





Myk PVC slange med PVC Spiral. Spesielt godt egnet for det Skandinaviske klimaet. Suge- trykkslange for flytende væsker. Oljebestendig


Soft PVC hose with rigid PVC, suitable for use in particularly cold climates, for suction and delivery of liquids.

- 
**GLATT OVERFLATE**  
 SMOOTH SURFACE \*\*\*\*\*


---

- 
**FLEKSIBILITET**  
 FLEXIBILITY Shore/hardhet 48 \*\*\*\*\*


---

- 
**SLITESTYRKE**  
 ABRASION RESISTANCE \*\*\*


---

- 
**TEMPERATUR OMRÅDE**  
 TEMPERATURE RANGE -40° C + 45° C

---

- 
**KJEMIKALIE BESTANDIGHET**  
 CHEMICAL RESISTANCE PVC OIL tabell


---

- 
**KNEKK STYRKE**  
 CRUSHING RESISTANCE \*\*\*\*

Ø ID Ø I.D.	Ø ID Ø I.D.	Ø ED Ø O.D.	VEKT WEIGHT	BØYERADIUS BENDING RADIUS	ARBEIDSTRYKK WORKING PRESS.	SPRENGTRYKK BURSTING PRESS.	VAKUUM VACUUM	KVEIL LENGDE COIL LENGTH
tommer	mm	mm	g/m	mm	bar	bar	m H <sub>2</sub> O	mt
2	<b>51</b>	61,8	1100	165	3	9	9	30
2 1/2	<b>63</b>	75,5	1450	205	3	9	9	30
3	<b>76</b>	89,2	1800	260	3	9	9	30
	<b>80</b>	94	1900	280	3	9	9	30
3 1/2	<b>89</b>	102,9	2250	300	2,5	7,5	9	30
4	<b>102</b>	117	2800	330	2	6	9	30
	<b>110</b>	126,4	3400	360	1,5	4,5	9	20
5	<b>127</b>	144	4000	420	1	3	9	20
6	<b>152</b>	170,4	5000	510	1	3	9	20

PVC Spiral  
PVC spiral

PVC  
PVC

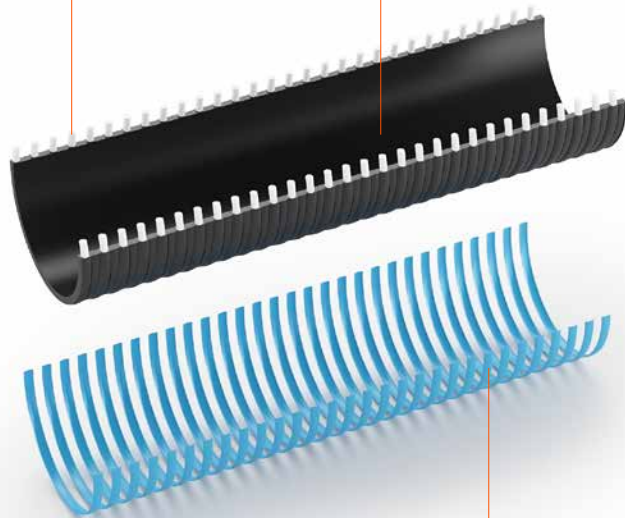

PVC Spiral  
PVC spiral

